




Always check our website for the most updated specifications: www.zumacollection.com

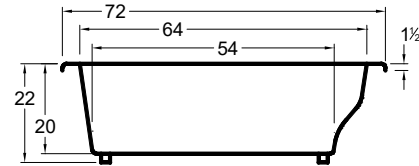

Pictured with optional waste and overflow

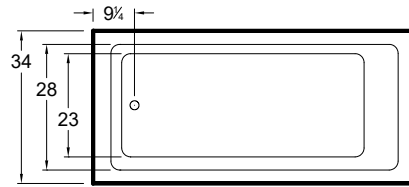

All bathtub dimensions are ± 1/2".

CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

DIMENSIONS

72" x 34" x 22"


Whirlpool Operating Gallons: 65

Gallons to Overflow: 95

Material: Acrylic


Undermount Yes No

Whirlpool




Combination

(pump and blower location only)



Airbath System II



LEGEND: P SYLLENT PUMP B BLOWER JET

SUCTION ACCESS PANEL (MINIMUM 16" X 20")

OPTIONAL ACCESSORIES

- Apron
- Chromotherapy Light
- Grab Bars
- High Density Insulation
- iBath Sound System
- Lo-Profile Tub Edge
- Ozone System
- (Whirlpool and/or Airbath only)*
- Pillow -12" - Angle
- Rotary Jets
- Thermal Comfort System
- (TCS can not be used with VSM)*
- Tile Flange Kit
- Trim Kit Upgrade
- Vibro Sonic Massage
- (VSM can not be used with TCS)*
- Waste & Overflow
- Linear Overflow

INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath[®] units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimension: 70" x 32"

LIST PRICE

| | |
|--------------------|--------|
| Tub Only | \$1750 |
| Whirlpool System | \$3750 |
| Airbath II System | \$3550 |
| Combination System | \$4950 |