



Always check our website for the most updated specifications: [www.zumacollection.com](http://www.zumacollection.com)

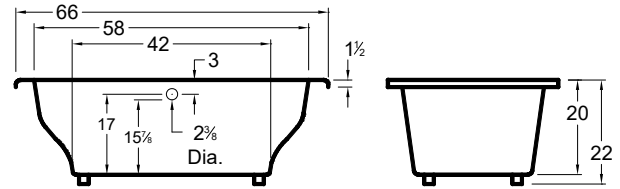

Pictured with optional waste and overflow

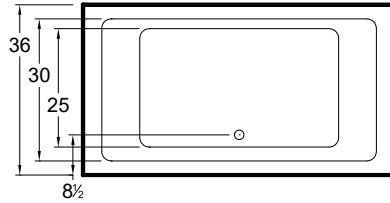

All bathtub dimensions are ± 1/2".

### CODES AND COMPLIANCE

Products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8

### ELECTRICAL REQUIREMENTS

We recommend one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### DIMENSIONS


66" x 36" x 22"

Whirlpool Operating Gallons: 53


Gallons to Overflow: 90

Material: Acrylic


### Whirlpool



### Combination (pump and blower location only)



### Airbath System II



**LEGEND:**

- P SYLLENT PUMP
- B BLOWER
- JET
- SUCTION
- ACCESS PANEL (MINIMUM 16" X 20")

### OPTIONAL ACCESSORIES

- Apron
- Chromotherapy Light
- Grab Bars
- High Density Insulation
- iBath Sound System
- Lo-Profile Tub Edge
- Ozone System
- (Whirlpool and/or Airbath only)*
- Pillow -12" - Angle
- Rotary Jets
- Thermal Comfort System
- (TCS must be used at opposite end if used with VSM)*
- Tile Flange Kit
- Trim Kit Upgrade
- Vibro Sonic Massage
- (VSM must be used at opposite end if used with TCS)*
- Waste & Overflow
- Linear Overflow

### INSTALLATION TIPS

- Install product according to Owners manual and local codes.
- All whirlpool or Airbath<sup>®</sup> units require an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- Dimensions for undermount installations should be taken directly from the bathtub.
- Cut-out dimensions: 64" x 34"

Undermount    Yes     No